PTO/SB/21 (02-04)

Inder the Paperwork Reduction Act of 1995.	no nercon	U.S. Pate	nt and Trademark Offi	ce; U.S. D	ph 0//31/2006. OMB 0651-003 EPARTMENT OF COMMERC ws a valid OMB control numbe	
TO AN OLD TO		Application Number	10/825,130	and it silvery		
TRANSMITTAL		Filing Date	April 16, 2004			
FORM		First Named Inventor	WHATMOUGH, Ken			
(to be used for all correspondence after initial	filing)	Art Unit				
		Examiner Name		-		
Total Number of Pages in This Submission	23	Attorney Docket Number	42783-0051			
ENCLOSURES (Check all that apply)						
Fee Transmittal Form Fee Attached Amendment/Reply After Final Affidavits/declaration(s) Extension of Time Request Express Abandonment Request Information Disclosure Statement Certified Copy of Priority Document(s) Response to Missing Parts/ Incomplete Application Response to Missing Parts under 37 CFR 1.52 or 1.53		Drawing(s) Licensing-related Papers Petition Petition to Convert to a Provisional Application Power of Attorney, Revocation Change of Correspondence Add Terminal Disclaimer Request for Refund CD, Number of CD(s)	ress Co	Technolo peal Cor Appeals peal Cor ppeal Noti coprietary atus Lette	osure(s) (please	
SIGNA	TURE C	F APPLICANT, ATTORN	IEY, OR AGEN	Т		
David J. Greer Reg. No. 43,395 Signature Date David J. Greer Reg. No. 43,395	/Le	004				
	(د		M/MAIL ING			
I hereby certify that this correspondence is b sufficient postage as first class mail in an en- the date shown below.	eing facsi		r deposited with the			
Typed or printed name				,,,,		
Signature				Date	· ·	

This collection of information is required by 37 CFR 1.5. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to 2 hours to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.





Barristers & Solicitors | Patent & Trade-Mark Agents Technology Law Intellectual Property Law

TORONTO OFFICE

One Queen Street East, Suite 2400, Toronto, Ontario, M5C 3B1

UNITED STATES (via regular postal service)

PATENT & TRADE-MARKS CHECKLIST

Date: August 5, 2004

If you have any questions concerning this parcel, please contact Kim Setterington at (416) 868-1515 ext 298.

Patent Office

File No.	Serial No.	Cost Cod e	Amount	Due Date	Description	Mail Stop # or Box Descript	LIC/se c
42783-0051	10/825,130	-	0	Aug17/04	Priority document	-	DJG:ST M
Trade-Marks	Office		0		•		
Total Amount			\$ 0.00				

RIDOUT & MAYBEE LLP

Barristers & Solicitors

Patent & Trade-Mark Agents Technology Law | Intellectual Property Law

. Greer

T Dial: (416) 865-3503

nail: dgreer@ridoutmaybee.com

August 5, 2004

United States Patent and Trade-mark Office Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450

Dear Sirs:

Re:

UNITED STATES: Patent Application No. 10/825,130

Applicant:

Research In Motion Limited

Title:

SYSTEM AND METHOD OF CONVERTING EDGE RECORD

BASED GRAPHICS TO POLYGON BASED GRAPHICS

Our File:

42783-0051

We enclose a certified copy of the priority document in respect of the above-noted application, namely UK patent application No. GB 0308949.7, filed April 17, 2003, and a completed transmittal form for filing in the United States Patent and Trade-mark Office.

We look forward to receiving confirmation that the certified copy has been received.

Yours very truly,

RIDOUT & MAYBEE LLP

David J. Green

Reg. No. 43, 395

DJG:STM Encls.

H:\Public\SMartin\Patents\42783-0051\USPTO-certifiedcopy.doc





The Patent Office Concept House Cardiff Road Newport South Wales NP10 800

the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the imptroller-General, hereby certify that annexed hereto is a true copy of the documents as ginally filed in connection with the patent application identified therein.

accordance with the Patents (Companies Re-registration) Rules 1982, if a company named his certificate and any accompanying documents has re-registered under the Companies Act 0 with the same name as that with which it was registered immediately before restration save for the substitution as, or inclusion as, the last part of the name of the words lic limited company" or their equivalents in Welsh, references to the name of the company is certificate and any accompanying documents shall be treated as references to the name which it is so re-registered.

cordance with the rules, the words "public limited company" may be replaced by p.l.c., P.L.C. or PLC.


gistration under the Companies Act does not constitute a new legal entity but merely ts the company to certain additional company law rules.


Signed

Dated

5 May 2004

BEST AVAILABLE COPY





Patents (Rule 16)

Fu- £ 45 19APR03 E801216-1 D02094

P01/7700 0.00-0308949.7

Request for grant of a patent

give the number and filing date of the

earlier application



Cardiff Road Newport

1.	Your reference	JFW/43805GB1	
2.	Patent application number	0308949.7	
3.	Full name, address and post code of the or each applicant	Research In Motion Limited 295 Phillip Street Waterloo N2L 3W8 ON Canada	
	Patents ADP number	8605396001	
	If the applicant is a corporate body, give the country/state of its incorporation	Canada — ONterno	41C 15Mayo3 KR.
4.	Title of the invention	System and Method of Conv Graphics to Polygon Based	verting Edge Record Based Graphics
5.	Name of your agent	VENNER, SHIPLEY & CO	Kilburn & Strode
	"Address for service" in the United Kingdom to which all correspondence should be sent	20 LITTLE BRITAIN LONDON EC1A 7DH	20 Red Lion Street LONDON WCIR 4PJ
	Patents ADP	1669004	(FS:177) +·
6.	If you are declaring priority from one or more earlier patent applications, give the country ar the date of filing of the or each of these earlier applications and the or each application numb	nd r	application number Date of filing
7.	If this application is divided or otherwise derived from an earlier UK application,	Number of earlier application	Date of Filing



8.	a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'YES' if: a) any applicant in 3. above is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body)	YES
9.	Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document	
	Continuation sheets of this form	
	Description	12
	Claim(s)	3
	Abstract	1 //
	Drawing(s)	11 + 11 /4
10.	If you are also filing any of the following state how many against each item. Priority documents	
	Translations of priority documents	
	Statement of inventorship and right to grant of a patent (Patents Form 7/77)	Two
	Request for preliminary examination and search (Patents Form 9/77)	One
	Request for substantive examination (Patents Form 10/77)	
	Any other documents	
11.		I/We request the grant of a patent on the basis of this application. Date 17 April 2003
12	Name and daytime telephone number of person to contact in the United Kingdom	Jan-Walaski 020 7600 4212

DUPLICATE

SYSTEM AND METHOD OF CONVERTING EDGE RECORD BASED GRAPHICS TO POLYGON BASED GRAPHICS

BACKGROUND OF THE INVENTION

[0001] The present invention relates to computer graphics files.

the use of resource limited media devices such as personal digital assistants (PDAs), cell phones, pagers, organizers and wireless mobile computing devices, grows, the interest in displaying graphics images on such devices also grows. However, such devices frequently have limited storage and processing power, and where applicable, limited communication bandwidth. As a result, such devices can benefit from the use of graphic formats that are different from those commonly used in relatively resource rich devices. Thus, it would be advantageous to provide a system and method for converting one format of graphic to another format suitable for a resource limited device.

SUMMARY OF THE INVENTION

[0003] Embodiments of the present invention provide a system and method for converting one format of a graphic to another format.

[0004] According to an example embodiment, there is provided a method for converting graphic object data that defines a graphic object. The method includes converting the graphic object data from a path format to a second format, the path format including path elements that are each associated with a fill style and define one or more polygon shapes at least partially filled with the associated fill style, the path elements collectively defining the graphic object. The conversion includes (i) redefining the polygon shapes defined by the path elements as groups of triangles, and (ii) combining at least some of triangles in the groups of triangles into further polygon shapes that fall within predetermined complexity thresholds. In various embodiments, the method includes a first converting step of converting the graphic object data from an edge record based format to the path format, the edge record based format including a plurality of edge records each defining an edge of the graphic object, the edge records

including information associating the defined edges with fill styles that the edges border against.

[0005] According to another example embodiment, there is provided a method for converting graphic object data defining a graphic object from an edge record based format to a path format, the edge record based format including a plurality of edge records each defining an edge of the graphic object, the edge records including information associating the defined edges with fill styles that the edges border against, the path format including path elements that each define one or more polygon shapes that are filled with an associated fill style, the path elements collectively defining the graphic object. The method includes, for each fill style, identifying from the edge records each unique vertex that borders on the fill style and identifying each of the outgoing edges from the identified vertices that border on the fill style; and for each fill style, creating an associated path element defining one or more polygon shapes that are filled with the identified unique fill style, based on the identified vertices and outgoing edges.

[0006] According to another example embodiment of the invention, there is provided a system for converting graphic object data defining a graphic object having associated fill styles from a path format to a second format, the path format including path elements that are each associated with a fill style and define one or more polygon shapes at least partially filled with the associated fill style, the path elements collectively defining the graphic object. The system includes a triangulation module for redefining the polygon shapes defined by the path elements as groups of triangles, and a combining module for combining at least some of triangles in the groups of triangles into further polygon shapes that fall within predetermined complexity thresholds.

[0007] Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying Figures.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Embodiments of the present invention will now be described, by way of example only, with reference to the attached Figures, wherein:

[0009] Figure 1 is a block diagram showing a format conversion system according to embodiments of the invention;

[0010] Figure 2 is a block diagram showing a first format converter of the format conversion system of Figure 1;

[0011] Figure 3 is a block diagram of a representative graphic object for explaining aspects of the invention;

[0012] Figure 4 is a representation of a source graphic file describing the graphic object of Figure 3;

[0013] Figure 5 is a representation of a fill style table describing the graphic object of Figure 3;

[0014] Figure 6 is a block diagram of a process used to create a fill style table according to embodiments of the invention;

[0015] Figure 7 is a representation of an intermediate graphic file describing the graphic object of Figure 3;

[0016] Figure 8 is an exploded view of the graphic object of Figure 3;

[0017] Figure 9 is a block diagram showing a second format converter of the format conversion system of Figure 1;

[0018] Figure 10 is a block diagram of a process used to combine triangulated regions into polygons, according to embodiments of the invention; and

[0019] Figure 11 is a further exploded view of the graphic object of Figure 3.

[0020] Like reference numerals are used throughout the Figures to denote similar elements and features.

DETAILED DESCRIPTION

[0021] Referring to the drawings, Figure 1 is a block diagram of a graphic format conversion system according to example embodiments of the invention. The system includes a graphic converter 100 that converts a source graphic 102 that is in a first format to a converted graphic 104 that is in a second format. The source graphic 102 is an electronic file containing graphic object data or information that can

be used by a suitably configured rendering device to display one or more graphics objects. In an example embodiment, the source graphic 102 contains information in an edge record format to define the graphic objects. More particularly, in the presently described example embodiment, the source graphic 102 is a .SWF file conforming to the flash file format specified by Macromedia, Inc. The converted graphic 104 is an electronic file containing converted information that can be used by a viewing device 112 to display the one or more graphics objects. In the presently described embodiment, the converted graphic 104 is binary format file in which the graphics objects are defined as a series of polygon shapes, each associated with a fill style.

[0022] The first format converter 106 and the second format converter 110 of the graphic converter 100 are implemented as computer software which is executed by one or more computers. In various embodiments, the first and second format converters 106, 110 are both implemented by software on the same computer, or are implemented by software on different computers, with the intermediate graphic 108 being transmitted or otherwise transferred between the computers.

[0023] The viewing device 112 is in various embodiments a data communications device, a multiple mode communications device configured for both data and voice communication, a mobile communications device, a PDA enabled for wireless communications, a 1-way or 2-way pager, a computer system, and/or a type of fixed or wireless communications device. The viewing device 112 receives the converted graphic 104 over a communication link 114, which includes in various embodiments a wireless network, a wired network, and/or dedicated or local communications lines or conductors. The viewing device 112 includes an application such as a media engine that is configured to interpret the information contained in the converted graphic 104 and generate a visible image on a screen of the viewing device representative of the information contained in the converted graphic 104.

[0024] Figure 2 is a block diagram of the first format converter 106, which in an example embodiment is configured to convert a .SWF flash file source graphic 102 into a SVG (scalable vector graphics) format intermediate graphic 108. As known in the art SVG is a vector graphics file format that enables two-dimensional images to

be displayed in XML pages. SVG images are created through text-based commands formatted to comply with XML specifications. An SVG standard, SVG 1.0 specification has been recommended by W3C (World Wide Web Consortium). In various embodiments, the first and second format converters 106, 110 may not support all SVG specified features, however the features they do support conform to SVG specifications.

[0025] As shown in Figure 2, the first format converter 106 includes first and second sub-converters 116, 118. The first sub-converter 116 is configured to convert the edge records that are contained in the .SWF flash file source graphic 102 into a fill style table 120, which is then converted by the second sub-converter 118 into SVG intermediate graphic 108.

[0026] For the purpose of explaining embodiments of the invention, Figure 3 shows a representation of an example of a two dimensional graphical object 300. The graphical object 300 comprises a central square 302, overlapped on diagonal corners by two smaller squares 304 and 306. The central square 302 has a square opening 308 in its center. The smaller squares 304 and 306 are filled with blue (as denoted by "B" in Figure 3), the central square 302 is filled with red (as denoted by "R" in Figure 3), and the overlap regions between the squares are filled with green (as denoted by "G" in Figure 3). The square opening 308 has no fill style. The object 300 has 24 edges, labelled by reference numerals 1 to 24 in Figure 3. An edge is a line in the object 300 that has start and end points at locations where the line meets at a vertex with another line or where the line terminates without meeting another line. Each vertex (i.e. point where two or more edges meet) of the object 300 in Figure 3 is labelled with absolute (X,Y) coordinates.

[0027] Figure 4 shows an example source graphic file 102A showing a series of edge records 124, each associated with an edge 1 to 24 of the graphic object 300. The file 102A is an XML representation of a .SWF flash file edge record format used in source graphic 102 to describe the graphic object 300 - here the use of XML is purely for illustrative purposes; .SWF is a binary file format, and thus example file 102A is a human readable description of the .SWF source graphic file for graphic object 300. As can be seen in Figure 4, the source file 102A includes fill style

indexes 126 for each of the fill styles (blue, green and red, in the illustrated example) used in the graphic object 300. The source file 102A includes "StyleChangeRecords" 127 that associate the edge records for each edge 1-24 with the fill style(s) that the respective edge borders. The source file 102A also includes a LineStyle command that specifies the characteristics of lines used around the edges of the fill regions. The source graphic file 102A defines a starting absolute (X,Y) coordinate value in the display plane, namely vertex (100, 80), and defines the first edge 1 by specifying an (X,Y) delta value (20,0) that specifies the end point of first edge 1 relative to the starting vertex. Edge 2 is then defined by a delta value (0,40) that specifies the end point of the first edge 2 relative to its starting point (which is the end of first edge 1). The remaining edges are defined in a similar manner, with "moveTo" commands being used where the starting point of an edge does not coincide with the end of a previously defined edge (see for example, the moveTo command between edge record 16 and edge record 17 in Figure 4). The edge records can appear in any particular order, and the first sub-converter 116 makes no assumptions about the order of edge records. The edge records can define fill on both sides (see edges 21 and 22 for example).

[0028] The first sub-converter 116 is configured to read the information in the source graphic 102 and construct and populate a corresponding fill style table 120. Figure 5 shows an example fill style table 120A representative of the output of first sub-converter 116 in response to the source graphic file 102A. The fill style table 120A includes a sub-table 128 associated with each unique fill style (blue, green, red in the present example) specified in the source graphic file 102A. Each of the sub-tables 128 includes edge connection data 130 that describes the perimeter(s) of any areas that are filled with the fill style associated with the respective sub-tables. For example, in graphic object 300, there are two blue fill style region areas, and the edge connection data 130 for the blue fill style defines the perimeters of the two blue fill style region areas. The connection data 130 for each of the fill styles includes a list 132 of each unique vertex that borders the regions that are filled with the associated fill style. Associated with each vertex entry is a list 134 of the edges that are outgoing from each vertex that borders the associated fill style regions. The lists

134 of edges in connection data 130 includes, for each edge, information defining the "to" vertex that the edge ends at — for example, the first list 134 in table 120A identifies edges 1 and 13 as outgoing from vertex (100, 80) and having "to" vertices (120, 80) and (100,100), respectively.

In an example embodiment, the first sub-converter 116 performs process 600 shown in Figure 6 in respect of each of the edge records in source graphic 102 to create the fill style table. As indicated in step 602, the first sub-converter 116 reads an edge record 124 in the source graphic 102 and identifies the "from" and "to" vertices of the subject edge. As the sub-converter 116 processes each edge record, it identifies the "from" vertex of each edge by keeping track of the absolute coordinates provided in the "MoveTo" commands that are embedded in selected StyleChange Records 127, and also by tracking the "delta" commands that are contained in the edge records 124. In step 602, the "to" vertex for the subject edge is determined by adding the delta coordinates provided in the subject edge record to the coordinates of the "from" vertex of the edge. By tracking StyleChange Records 127, the sub-converter 116 tracks the fill style(s) that the subject edge borders against – as can be appreciated from Figure 3, a single edge (for example, edge 13) can border against and thus be associated with more than one fill style. [0030] As indicated in step 604, once the "from" and "to" vertices of the subject edge have been identified, the sub-converter 116 looks at the sub-table 128 of the fill style associated with the subject edge to determine if the "from" vertex is already listed in the sub-table and will create a new unique "from" vertex entry in the list 132 of the appropriate fill style sub-table 128 if the "from" vertex has not yet been previously added. In instances where the edge is associated with two fill styles, the "from" vertex is included in the unique vertex list 132 of each of the associated fill style sub-tables 128. As indicated in step 606, information identifying the subject edge, including it's "to" vertex is then added to the outgoing edges list 134 of the "from" vertex of the subject edge. In instances where the edge is associated with two fill styles, the information is added to the outgoing edge list 130 of the "from" vertex in each of the associated fill style sub-tables 128. Steps 602, 604 and 606 are repeated until all edge records in the source graphic have been processed. In the

example embodiment illustrated through source graphic file 102A and fill style table 120A, the delta coordinate values in the edge records of source graphic file 102A are converted to absolute X,Y coordinate values for the vertices listed in fill style table 120A. It will be understood that the information contained in fill style table 120A represents the example graphic object 300. Line Style information is in various embodiments identified in the edge connection data 130.

[0031] The second sub-converter 118 of the first format converter 106 is configured to covert the fill style table 120 into SVG compatible intermediate graphic 108. For explanatory purposes, Figure 7 shows the XML SVG source code of an intermediate graphic file 108A that is generated by the second sub-converter 118 in response to fill style table 120A, and which describes graphic object 300. The intermediate graphic file 108A includes an SVG path element 136(1), 136(2) and 136 (3) for each of the unique fill styles (blue, green, red, respectively) found in the fill style table 120. Each SVG path element 136(i), where 1=i=3 in the described example, describes a fill region (which may have multiple discrete parts) for the fill type that it is associated with. The intermediate graphic file 108A also includes a path element 138 that describes the "stroke", which defines the lines that surround the edges of the fill regions. In example graphic object 300, a stroke having a black color and a width of one pixel is used throughout the object.

[0032] The following table represents in pseudo code an example method used by the second sub-converter 118 to convert the fill style table 120 into intermediate graphic 108:

TABLE 1: Method for Converting Fill Style Table to SVG Intermediate Graphic

for each fill style in the fill style table:

begin writing an SVG 'path' element for that fill style

obtain the edge connection data for that fill style

reset all edges to "unvisited"

for each vertex in the edge connection data:

obtain the list of outgoing edges for that vertex

for each edge, L, in the list:

visit(L)

finish writing the SVG 'path' element

procedure visit(edge E)

if (E is unvisited)

mark E as "visited"

write the SVG drawing command represented by

 \mathbf{E}

obtain the list of outgoing edges for the "to" vertex of ${\bf E}$

find the first unvisited edge, M, in the list and, if found:

visit(M)

[0033] As can be appreciated from Figure 7, each SVG path element 136(i) effectively describes one or more polygons that are filled with the fill style that the path element is associated with. By way of example, Figure 8 shows an exploded view of graphic object 300. Path element 136(1) describes the blue fill style region which includes polygons 320 and 322 that are filled with blue fill style. Path element 136(2) describes the green fill style region that includes polygons 324 and 326 that are filled with green fill style. Path element 136(3) describes the red fill style region, which includes polygon 328 that is filled with red and which includes an island contour that defines non-fill region 308. Path 138 describes the "stroke" surrounding the fill regions.

[0034] As can be appreciated from Figures 7 and 8, the SVG path elements of the intermediate graphic can define relatively complex polygons. The second format converter 110 is configured to compile the SVG intermediate graphic 108 into less complex polygons that can be efficiently used by a media engine of the viewing device 112 to reproduce the graphic object 300. With reference to Figure 9, the second format converter includes a triangulation module 150 and a combining module 152. The triangulation module 150 resolves the polygon shapes that are defined by each of the SVG path elements of the intermediate graphic 108 to output data defining a series of triangles that are each associated with a fill style. The information defining the triangles and associated fill styles are output as electronic triangulated graphic data 154.

[0035] By way of example, Figure 8 includes dashed lines showing one possible triangulation of polygons 320, 322, 324, 326 and 328 of graphic object 300 performed by triangulation module 150. In the illustrated example, blue fill style polygons 320 and 322 have been redefined as triangles B1-B4 and B5-B8, respectively. Green fill style polygons 324 and 326 have been redefined as triangles G1-G2 and G3-G4, respectively. Red fill style polygon 328 has been redefined as triangles R1-R12. Various triangulation methods can be used in various embodiments to triangulate the polygons defined in the SVG intermediate graphic. In an example embodiment, a triangulation method based on the FIST (Fast Industrial-Strength Triangulation of Polygons) algorithm as described in Held,M., FIST: Fast Industrial-Strength Triangulation of Polygons, *Algorithmica* (2001) 30: 563-596, DOI: 10.1007/s00453-001-0028-4, is used by triangulation module 150.

[0036] In an example embodiment the triangulated graphic data 154 includes records that define the edges and vertices and associated fill styles of each of the triangles that make up the subject graphic object. In order to reduce the amount of data required to define the subject graphic object, the combining module 152 of the second format converter 110 is configured to combine the triangles defined in triangulated graphic data 154 into larger polygons that fall within predetermined complexity restrictions.

[0037] Figure 10 shows a combining process 700 used by combining module 152 in an example embodiment of the invention. As indicated in step 712, the combining module 152 creates a new polygon record by selecting a triangle from the triangulated graphic data 154 and adding the data that defines the triangle to the polygon record. As indicated in step 714, the combining module 152 than determines if there is a same fill style triangle that borders on the polygon which has not already part of a polygon previously created by the combining module. If there is a bordering triangle that has not previously been added to another polygon, the combining module then determines if adding the bordering triangle to the current polygon would result in a polygon that falls within predetermined complexity restrictions (step 716), and if so, it is added to the polygon (step 718), otherwise the bordering triangle is not added to the polygon. The combining module continues process steps 714, 716 and 718 until all bordering triangles that can be added to the polygon without violating the complexity restrictions have been, after which the combining module closes the polygon (step 720). A new polygon record is then created by adding to it a triangle that has not previously been added to a polygon, and then steps 714, 716 and 718 are again iteratively repeated for the new polygon. Process 700 continues until all triangles defined in the triangulated graphic data 154 have been added to a polygon (in some cases, the resulting polygon may only include a single triangle, and in some cases, may include several). It will be appreciated that other processes could also be used in addition to or in place of process 700 to consolidate the triangulated graphic data. The converted graphic 104 output by the combing module 152 define, using polygons, the same fill regions that were defined in triangulation graphic data, but in a more space-efficient format.

[0038] The complexity restrictions that are applied in step 720 are generally selected based on the capabilities of the media engine at the viewing device 112, which in turn will typically depend on the processing and memory resources available at the viewing device and the bandwidth of the communications channel 114. The complexity restrictions or thresholds can vary depending on the requirements of the specific application, and in various embodiments are set up to

limit the polygons defined in converted graphic 104 to polygons that are simple polygons, to polygons having no internal islands, to polygons having only convex vertices, and/or to polygons having fewer than a predetermined number of edges.

[0039] By way of example, Figure 11 shows a further exploded view of graphic object 300 in which the previously triangulated fill style regions may be combined by combining module 118 to form polygons. In red fill style region 328, triangles have been combined to form polygons R1+R2, R3+R4, and so on. In green fill style regions 326 and 328, the triangles have been combined to form polygons G1+G2 and G3+G4, respectively. Similarly, the triangles associated with blue fill style regions 320 and 322 have been combined to form polygons as illustrated. In the example of Figure 11, the complexity restrictions have been applied such that all of the resulting polygons are each simple polygons that each define continuous internal same fill-style areas without internal islands and which have no reflex vertices, but rather only convex vertices. The resulting polygons of Figure 11 are also each limited to four sides.

[0040] It will be appreciated that in computer graphics, curved lines are often formed by connecting a series of small edges at angles to each other. Thus, the methods of the present invention can also be applied to objects having what are perceived as curved boundaries.

[0041] In some embodiments, the second format converter may not go through the process of combining the triangulated graphic data 154, but rather may use such data directly for converted graphic 104.

[0042] The above-described embodiments of the present invention are intended to be examples only. Alterations, modifications and variations may be effected to the particular embodiments by those skilled in the art without departing from the scope of the invention, which is defined by the claims appended hereto.

WE CLAIM:

- 1. A method for converting graphic object data that defines a graphic object, comprising steps of:
- (a) converting the graphic object data from a path format to a second format, the path format including path elements that are each associated with a fill style and define one or more polygon shapes at least partially filled with the associated fill style, the path elements collectively defining the graphic object, the conversion including:
 - (i) redefining the polygon shapes defined by the path elements as groups of triangles; and
 - (ii) combining at least some of triangles in the groups of triangles into further polygon shapes that fall within predetermined complexity thresholds.
 - 2. The method of claim 1 further including, prior to step (a), a first converting step of converting the graphic object data from an edge record based format to the path format, the edge record based format including a plurality of edge records each defining an edge of the graphic object, the edge records including information associating the defined edges with fill styles that the edges border against.
 - 3. The method of claim 2 wherein the first converting step includes: for each fill style, identifying from the edge records each unique vertex that borders on the fill style and identifying each of the outgoing edges from the identified vertices that border on the fill style; and

for each fill style, creating the associated path element, based on the identified vertices and outgoing edges.

4. The method of claim 1 wherein the second format graphic object data includes information defining the further polygons, the method including a step of sending the second format graphic object data over a communications link to a

viewing device having predetermined capabilities, and wherein the complexity thresholds are based on the predetermined capabilities of the viewing device.

5. A method for converting graphic object data defining a graphic object from an edge record based format to a path format, the edge record based format including a plurality of edge records each defining an edge of the graphic object, the edge records including information associating the defined edges with fill styles that the edges border against, the path format including path elements that each define one or more polygon shapes that are filled with an associated fill style, the path elements collectively defining the graphic object, the method including:

for each fill style, identifying from the edge records each unique vertex that borders on the fill style and identifying each of the outgoing edges from the identified vertices that border on the fill style; and

for each fill style, creating an associated path element defining one or more polygon shapes that are filled with the identified unique fill style, based on the identified vertices and outgoing edges.

- 6. The method of claim 5, including converting the graphic object data from the path format to a triangulated format by redefining the polygon shapes defined by the path elements as groups of triangles.
- 7. The method of claim 6, including converting the graphic object data from the triangulated format to a further format by combining at least some of triangles in the groups of triangles into further polygon shapes that fall within predetermined complexity thresholds.
- 8. A system for converting graphic object data defining a graphic object having associated fill styles from a path format to a second format, the path format including path elements that are each associated with a fill style and define one or more polygon shapes at least partially filled with the associated fill style, the path elements collectively defining the graphic object, the system including:

a triangulation module for redefining the polygon shapes defined by the path elements as groups of triangles; and

a combining module for combining at least some of triangles in the groups of triangles into further polygon shapes that fall within predetermined complexity thresholds.

9. The system of claim 8 further including a first format converter for converting the graphic object data from an edge record based format to the path format, the edge record based format including a plurality of edge records each defining an edge of the graphic object, the edge records including information associating the defined edges with fill styles that the edges border against, the fist format converter including:

a first sub-converter for identifying each unique fill style in the edge record based format graphic object data, and for each identified unique fill style, identifying from the edge records each unique vertex that borders on the fill style and identifying each of the outgoing edges from the identified vertices that border on the fill style; and

a second sub-converter for creating the associated path element, based on the identified vertices and outgoing edges, for each identified unique fill style.

10. The system of claim 8 wherein the complexity thresholds are configured so that the further polygons each are selected from the group consisting of polygons that have a continuous interior fill style region without internal island contours, polygons that have only convex vertices, polygons that have under a predetermined number of sides, and polygons that are simple polygons.

ABSTRACT

A method for converting graphic object data that defines a graphic object, including converting the graphic object data from a path format to a second format, the path format including path elements that are each associated with a fill style and define one or more polygon shapes at least partially filled with the associated fill style, the path elements collectively defining the graphic object. The conversion includes (i) redefining the polygon shapes defined by the path elements as groups of triangles, and (ii) combining at least some of triangles in the groups of triangles into further polygon shapes that fall within predetermined complexity thresholds.

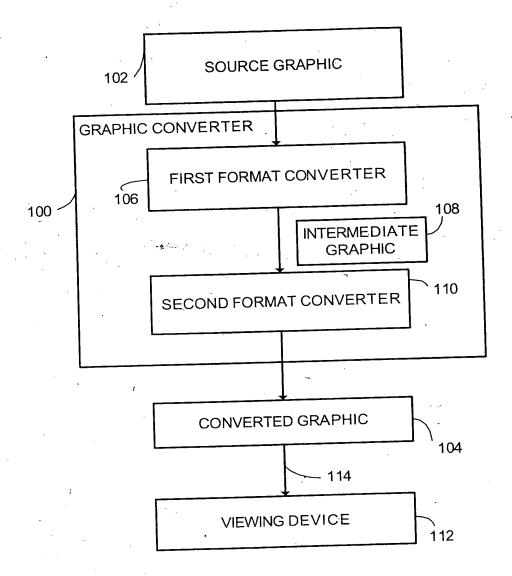


FIG. 1

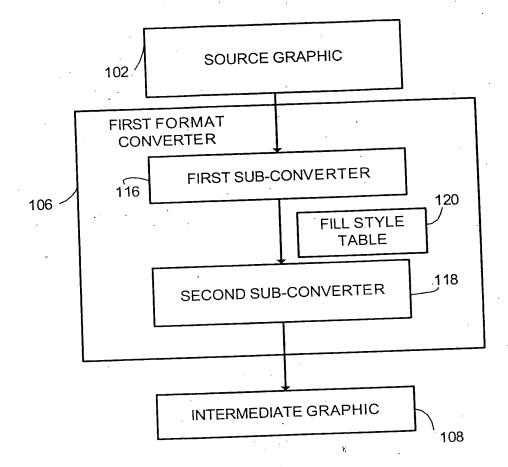


FIG. 2

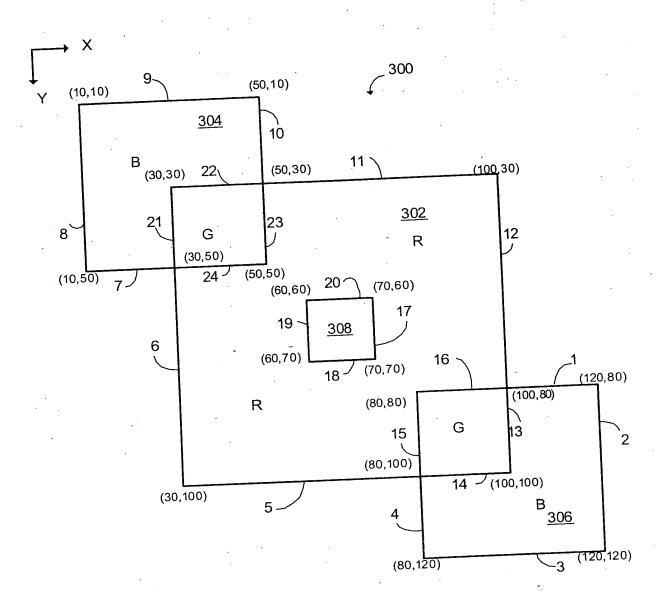


FIG.3

```
126
<FillStyleArray>
 <SolidFill
     color="Color(0,0,255)"/> <!-- Fill Style index 1 -->
 <SolidFill
     color="Color(0,255,0)"/> <!-- Fill Style index 2 -->
 <SolidFill
     color="Color(255,0,0)"/> <!-- Fill Style index 3 ->
</FillStyleArray>
<LineStyleArray>
  <LineStyle
     width="1.0"
     color="Color(0,0,0)"/>
 </LineStyleArray>
                                                         124
 <StyleChangeRecord
     moveTo="Vertex(100.0,80.0)"
     fillStyle1="1"
     lineStyle="1"/>
 <StraightEdgeRecord
                                 <! - Edge 1 -->
     delta="Delta(20.0,0.0)"/>
 <StraightEdgeRecord
                                 <! - Edge 2 -->
     delta="Delta(0.0,40.0)"/>
  <StraightEdgeRecord
                                  <!-- Edge 3 -->
     delta="Delta(-40.0,0.0)"/>
  <StraightEdgeRecord
                                  <!-- Edge 4 -->
     delta="Delta(0.0,-20.0)"/>
  <StyleChangeRecord <
      fillStyle1="3"/>
  <StraightEdgeRecord
                                  <!-- Edge 5 -->
      delta="Delta(-50.0,0.0)"/>
  <StraightEdgeRecord /
                                  <!-- Edge 6 -->
      delta="Delta(0.0,-50.0)"/>
   <StyleChangeRecord *
      fillStyle1="1"/>
   <StraightEdgeRecord
                                   <!-- Edge 7 -->
      delta="Delta(-20.0,0.0)"/>
   <StraightEdgeRecord
                                   <!-- Edge 8 -->
       delta="Delta(0.0,-40.0)"/>
   <StraightEdgeRecord
                                   <! - Edge 9 -->
       delta="Delta(40.0,0.0)"/>
```

102A


<u>FIG. 4</u>

```
<StraightEdgeRecord
                              <! - Edge 10 -->
   delta="Delta(0.0,20.0)"/>
                                                             124
<StyleChangeRecord 127
   fillStyle1="3"/>
<StraightEdgeRecord
                              <! - Edge 11 -->
   delta="Delta(50.0,0.0)"/>
<StraightEdgeRecord
                               <! - Edge 12 -->
    delta="Delta(0.0,50.0)"/>
<StyleChangeRecord 127
    fillStyle0="1"
    fillStyle1="2"/>
 <StraightEdgeRecord
                               <! - Edge 13 -->
    delta="Delta(0.0,20.0)"/>
 <StraightEdgeRecord
                                <!-- Edge 14 -->
    delta="Delta(-20.0,0.0)"/>
 <StyleChangeRecord 127
    fillStyle0="3"/>
 <StraightEdgeRecord
                                <!-- Edge 15 -->
     delta="Delta(0.0,-20.0)"/>
  <StraightEdgeRecord
                                <! - Edge 16 -->
     delta="Delta(20.0,0.0)"/>
  <StyleChangeRecord *
     moveTo="Vertex(70.0,60.0)"
                                    127
     fillStyle1="0"/>
  <StraightEdgeRecord
                                <! - Edge 17'-->
     delta="Delta(0.0,10.0)"/>
  <StraightEdgeRecord
                                 <!-- Edge 18 -->
     delta="Delta(-10.0,0.0)"/>
  <StraightEdgeRecord
                                 <!-- Edge 19 -->
      delta="Delta(0.0,-10.0)"/>
  <StraightEdgeRecord
                                 <! - Edge 20 -->
      delta="Delta(10.0,0.0)"/>
  <StyleChangeRecord <
      moveTo="Vertex(30.0,50.0)"
      fillStyle0="1"
      fillStyle1="2"/>
   <StraightEdgeRecord
                                  <!-- Edge 21 -->
      delta="Delta(0.0,-20.0)"/>
   <StraightEdgeRecord
                                  <! - Edge 22 -->
      delta="Delta(20.0,0.0)"/>
   <StyleChangeRecord 127
       fillStyle0="3"/>
    <StraightEdgeRecord
                                  <! - Edge 23 -->
       delta="Delta(0.0,20.0)"/>
    <StraightEdgeRecord
       delta="Delta(-20.0,0.0)"/> <!-- Edge 24 -->
```

FIG. 4 (continued)

S	132	120A
Blue fill style	Vertex (100, 80)	Outgoing Edges 1, 13 Outgoing Edge 2
l	Vertex (120, 80)	Outgoing Edge 3
<u>128</u>	Vertex (120, 120)	Outgoing Edge 4
	Vertex (80, 120)	Outgoing Edges 7, 21
	130 \ Vertex (30, 50) \ Vertex (10, 50)	Outgoing Edge 8
	VCITCA (2032-7	Outgoing Edge 9
	Vertex (10, 10) Vertex (50, 10)	Outgoing Edge 10
	Vertex (100, 100)	Outgoing Edge 14
	Vertex (30, 30)	Outgoing Edge 22
	Vertex (100, 80)	Outgoing Edge 13
Green fill style	Vertex (100, 100)	Outgoing Edge 14
<u>128</u>	Vertex (80, 100)	Outgoing Edge 15
120	77 4 (80 80)	Outgoing Edge 16
	130 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	Outgoing Edge 21
	Vertex (30, 30)	Outgoing Edge 22
	Vertex (50, 30)	Outgoing Edge 23
	Vertex (50, 50)	Outgoing Edge 24
7 1 611 -4-10	Vertex (80, 100)	Outgoing Edges 5, 15
Red fill style	Vertex (30, 100)	Outgoing Edge
<u>128</u>	Vertex (50, 30)	Outgoing Edge 11
•	Vertex (100, 30)	Outgoing Edge 12 Outgoing Edge 16
	Vertex (80, 80)	Outgoing Edge 17
	130 \ Vertex (70, 60)	Outgoing Edge 18
	Vertex (70, 70)	Outgoing Edge 19
	Vertex (60, 70)	Outgoing Edge 20
Ł	Vertex (60, 60)	Outgoing Edge 23
	Vertex (50, 30)	Outgoing Edge 24
	Vertex (50, 50)	1000800

FIG. 5

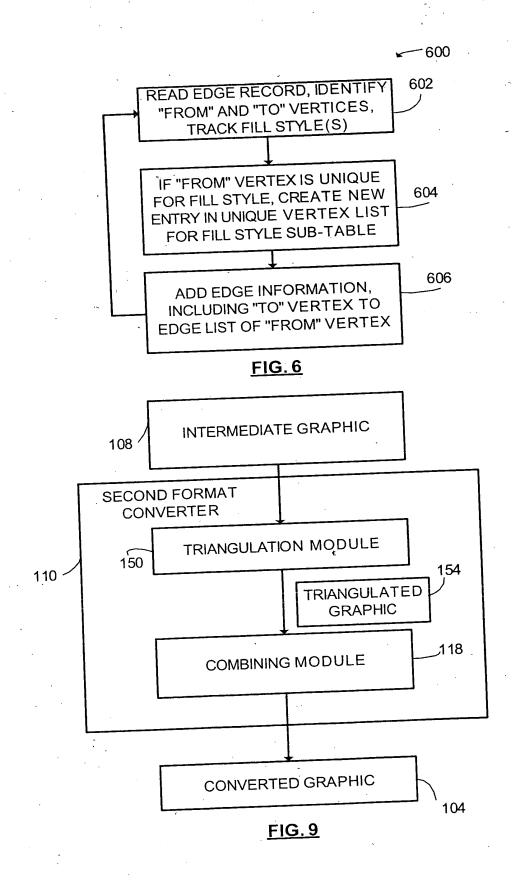

```
108A
<?xml version="1.0"?>
<!DOCTYPE svg SYSTEM "svg.dtd">
    width="130.0"
    height="130.0">
 <!-- Background rectangle -->
 <rect
     x="0.0"
     y='0.0'
     width="130.0"
     height="130.0"
     fill="rgb(255,255,255)"/>
                                                                          - 136(1)
      transform="translate(0.0 0.0) ">
    <path
       fill="rgb(0,0,255)"
       d="M120.0 80.0L100.0 80.0L100.0 100.0L80.0 100.0L80.0 120.0L120.0 120.0L120.0 80.0M10.0
 50.0L30.0 50.0L30.0 30.0L50.0 30.0L50.0 10.0L10.0 10.0L10.0 50.0"/>
                                                                           _ 136(2)
    <path
        fill="rgb(0,255,0)"
        d="M100.0 100.0L100.0 80.0L80.0 80.0L80.0 100.0L100.0 100.0M30.0 30.0L30.0 50.0L50.0
 50.0L50.0 30.0L30.0 30.0"/>
                                                                            _136(3)
    <path
        fill="rgb(255,0,0)"
        d="M30.0 100.0L80.0 100.0L80.0 80.0L100.0 80.0L100.0 30.0L50.0 30.0L50.0 50.0L30.0
  50.0L30.0 100.0M70.0 60.0L70.0 70.0L60.0 70.0L60.0 60.0L70.0 60.0"/>
        fill="none"
         stroke="rgb(0,0,0)"
         stroke-width="1.0"
         stroke-linecap="round"
         d="M100.0 80.0L120.0 80.0L120.0 120.0L80.0 120.0L80.0 100.0L30.0 100.0L30.0 50.0L10.0
  50.0L10.0 10.0L50.0 10.0L50.0 30.0L100.0 30.0L100.0 80.0L100.0 100.0L80.0 100.0L80.0 80.0L100.0
  80.0M30.0 50.0L30.0 30.0L50.0 30.0L50.0 50.0L30.0 50.0M70.0 60.0L70.0 70.0L60.0 70.0L60.0
   60.0L70.0 60.0"/>
    </g>.
   </svg>
```

FIG. 7

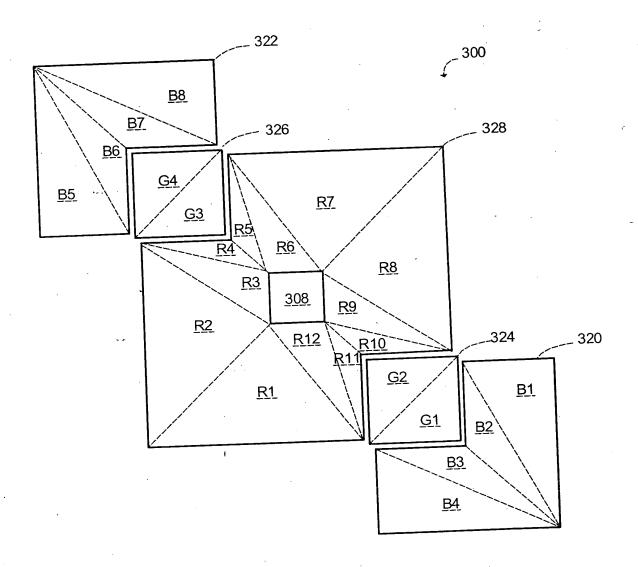


FIG. 8

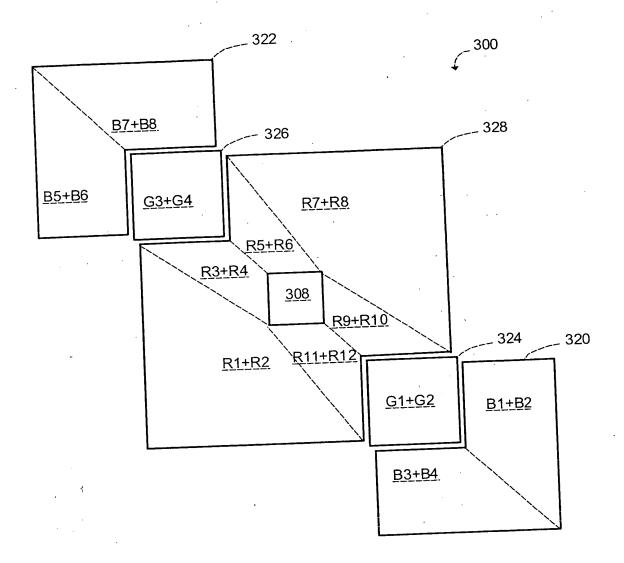


FIG. 11